DIRECTION FOR USE

FOR METAL, WOODEN & MASONRY SURFACE

Surface Preparation

- New surface to be cured 28 days before painting and free from all waterproofing issues
- Prepare the surface by using suitable sand/emery paper or scrapping tools to remove dirt, dust, grease, loose flaking paint, laitance, algae, fungi etc. and wipe it clean

Primer

Apply coat of Shalimar Primer depending upon the type of surface and allow it to dry for 6-8 hrs

- **Masonry Surface** : Wall Neutralizing Cement/ Universal White Primer
- **Ferrous Metal Surface** : Shalimar Red Oxide Metal Primer
- **Non-Ferrous Metal Surface** : Shalimar ETCH Primer
- **Wooden Surface** : Grey Primer / Pink Primer / Universal White Primer

Spot prime before and after filling nail holes/ cracks

Putty

- Level the surface with Shalimar Magic Acrylic Wall Putty or Shalimar Shakti Wall Guard putty and allow it to dry for 4-6 hrs
- Sand surface with 180/320 emery paper and wipe it clean
- Apply an additional coat depending upon the surface conditions and smoothen the surface

Primer

- Apply second coat of primer and allow it to dry for 6-8 hours
- Sand the surface and wipe it clean

Top Coat

- Thin Superlac Hi-gloss Enamel with Shalimar Turpsol thinner, 10% to 15% by volume for brush application & 15% - 20% by volume for spray
- Apply 2-3 coats of Superlac Hi-gloss Enamel with an interval of 12 hrs (depending upon climatic condition)
- Application can be done by brush, roller or spray

Application Surfaces

- All kind of well-prepared Metal surfaces, wooden surfaces and masonry surfaces

Scan to select from our entire color range

For any queries and complaints
1800 103 6509
(Mon to Fri from 9am to 6pm)

• Shade chip show approximate paint shade only. Actual shade may vary
• Some Shades may not be available in all Products, Kindly check with your nearest dealer for details.

DEALER STAMP

CSN-03

SHALIMAR PAINTS
Shalimar Paints Ltd.
Regd. Office - Stainless Centre, 4th Floor, Plot No. 50, Sector - 32, Gurugram, 122001, Haryana
feedback@shalimarpaints.com
www.shalimarpaints.com

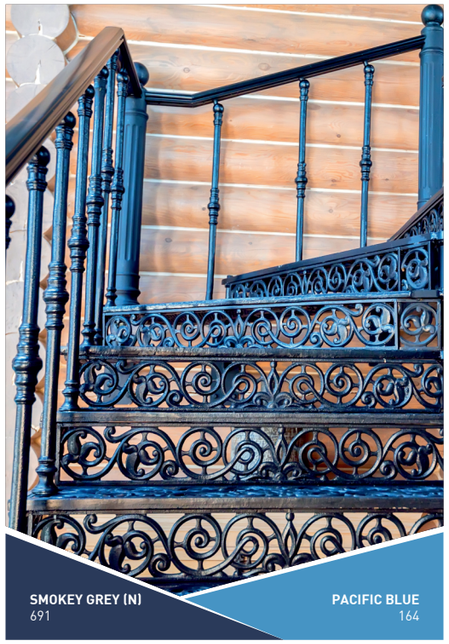

SUPERLAC PREMIUM HI-GLOSS ENAMEL

HIGH GLOSS | LONG LASTING

HIGHER OPACITY | DURABLE FINISH | EXCELLENT COVERAGE

Superlac Premium Hi-Gloss enamel is a modified alkyd based premium enamel offering smooth high gloss finish. It has excellent coverage, high opacity and quick drying features which offers durability and long lasting finish. It gives mirror like gloss and tough film. It is an eco-friendly product containing no added Lead, Chromium or Arsenic.

SHALIMAR
PAINTS
SINCE 1902

ENAMEL PAINT

FOR THE MODERN HOME

APPLE WHITE 728	CANDY 737	CLASSIC WHITE 738	SATIN BLUE 137 137	SUEDE 428	ASH GREY 607	SHE GOLD	COOL HINT AP12-3
OFF WHITE 727	ROSE CANDY 430	PISTA 248	WILD LILAC 162	DAWN 363	PALE CREAM 352	AL . OLIVE GREEN 252	PEACEFUL WHITE AP14-3
RAW SILK 320	PETAL 447	CASCADE GREEN 240	PACIFIC BLUE 164	SANDSTONE 381	MUSHROOM 436	SPL. DEEP ORANGE 506	VELVET TOUCH AP9-5
FRESH CREAM 303	PALE ROSE 431	WATER GREEN 256	SKY BLUE (N) 124	NEW GOLDEN BROWN 426	LIGHT GREY 631	BUS GREEN 253	SUMMER DAY AP10-4
ROYAL IVORY 735	DAWN GLOW 578	OPALINE GREEN 275	NILGIRI BLUE 148	GOLDEN BROWN 434	BRANDY 364	MID BUFF 359	EGGSHELL AP14-5
CANARY YELLOW 311	TRACTOR ORANGE 553	APPLE GREEN 281	WILD PURPLE 160	LEAF BROWN 469	SMOKE GREY (N) 691	DARK GREEN 214	SHY SKY AP9-6
LEMON YELLOW 305	SIGNAL RED 537	AQUA MARINE 274	PHIROZI (N) 110	CHERRY RED 525	JADE GREEN 238	OXFORD BLUE 105	PINK PUFF AP5-6
GOLDEN YELLOW (N) 304	P.O. RED 538	MINT GREEN 233	FRENCH BLUE 166	BROWN (N) 413	D. A. GREY 632	BLACK 801	EARLY SPROUT AP22-3

Tint DIRECT SPECIAL